

ACTUATOR-/INDICATOR COMPONENT ON LAMP HOLDER  
3SB3400-1A TRANSFORMATORS FOR SNAPPING SCREW  
TERMINAL RATED VOLTAGE 240/6V AC



Figure similar

|                                      |                  |
|--------------------------------------|------------------|
| Product designation                  | lamp transformer |
| Contact block/ lampholder:           |                  |
| Number of lampholders                | 0                |
| General technical data:              |                  |
| Product function                     |                  |
| • positive opening                   | No               |
| Product component                    |                  |
| • diode                              | No               |
| • lamp transformer                   | Yes              |
| • Light source                       | No               |
| • series resistor                    | No               |
| Insulation voltage                   |                  |
| • rated value                        | 250 V            |
| Degree of pollution                  | class 3          |
| Type of voltage                      |                  |
| • of the input voltage               | AC               |
| Surge voltage resistance rated value | 4 kV             |

|                                                                     |      |
|---------------------------------------------------------------------|------|
| <b>Protection class IP</b>                                          |      |
| • of the enclosure                                                  | IP40 |
| • of the terminal                                                   | IP20 |
| <b>Equipment marking</b>                                            |      |
| • acc. to DIN 40719 extended according to IEC 204-2 acc. to IEC 750 | H    |
| • acc. to DIN EN 61346-2                                            | P    |
| • acc. to DIN EN 81346-2                                            | P    |

#### Auxiliary circuit:

|                              |   |
|------------------------------|---|
| <b>Number of NC contacts</b> |   |
| • for auxiliary contacts     | 0 |
| <b>Number of NO contacts</b> |   |
| • for auxiliary contacts     | 0 |
| <b>Number of CO contacts</b> |   |
| • for auxiliary contacts     | 0 |

#### Inputs/ Outputs:

|                                                             |     |
|-------------------------------------------------------------|-----|
| <b>Output voltage 1 of the lamp transformer rated value</b> | 6 V |
|-------------------------------------------------------------|-----|

#### Connections/ Terminals:

|                                      |                      |
|--------------------------------------|----------------------|
| <b>Type of electrical connection</b> | screw-type terminals |
|--------------------------------------|----------------------|

#### Ambient conditions:

|                            |                |
|----------------------------|----------------|
| <b>Ambient temperature</b> |                |
| • during operation         | -25 ... +60 °C |
| • during storage           | -25 ... +80 °C |

#### Installation/ mounting/ dimensions:

|                      |                |
|----------------------|----------------|
| <b>Mounting type</b> | front mounting |
| <b>Height</b>        | 38.6 mm        |
| <b>Width</b>         | 30 mm          |
| <b>Depth</b>         | 50.2 mm        |

#### Certificates/approvals

|                                 |                                  |              |
|---------------------------------|----------------------------------|--------------|
| <b>General Product Approval</b> | <b>Declaration of Conformity</b> | <b>other</b> |
|---------------------------------|----------------------------------|--------------|



[Umweltbestätigung](#)

[Bestätigungen](#)

#### Further information

**Information- and Downloadcenter (Catalogs, Brochures,...)**  
<http://www.siemens.com/industrial-controls/catalogs>

**Industry Mall (Online ordering system)**

<https://mall.industry.siemens.com/mall/en/en/Catalog/product?mlfb=3SB3400-3P>

**Cax online generator**


<http://support.automation.siemens.com/WW/CAXorder/default.aspx?lang=en&mlfb=3SB3400-3P>

**Service&Support (Manuals, Certificates, Characteristics, FAQs,...)**

<https://support.industry.siemens.com/cs/ww/en/ps/3SB3400-3P>

**Image database (product images, 2D dimension drawings, 3D models, device circuit diagrams, EPLAN macros, ...)**

[http://www.automation.siemens.com/bilddb/cax\\_de.aspx?mlfb=3SB3400-3P&lang=en](http://www.automation.siemens.com/bilddb/cax_de.aspx?mlfb=3SB3400-3P&lang=en)

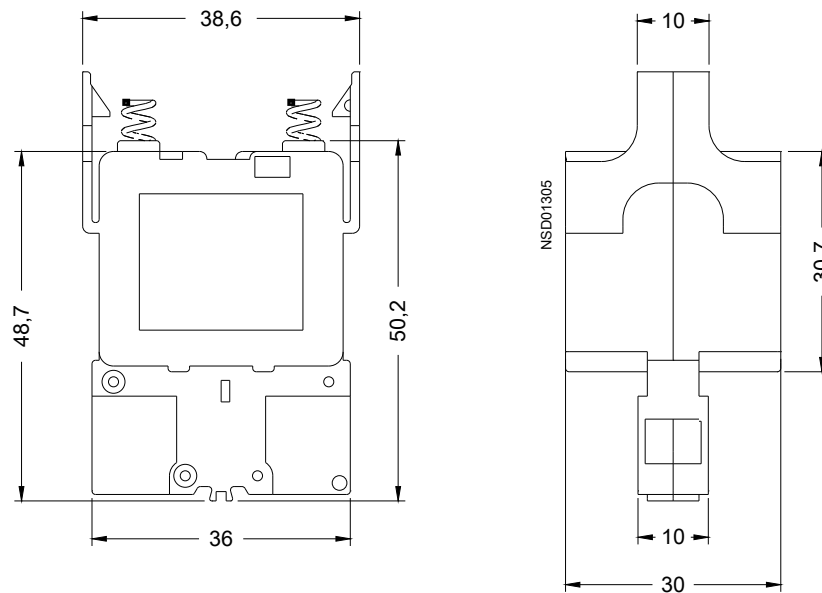

last modified:

10/07/2016