

SIMATIC S7, MODBUS MASTER V3.1 SINGLE LICENSE F.1
 INSTALLATION R-SW, SW AND DOCU. ON CD, HW-DONGLE,
 CLASS A, 3 LANGUAGES (G,E,F), EXECUTABLE U. STEP7 FROM
 V4.2, REFERENCE-HW: CP341 AND CP441-2

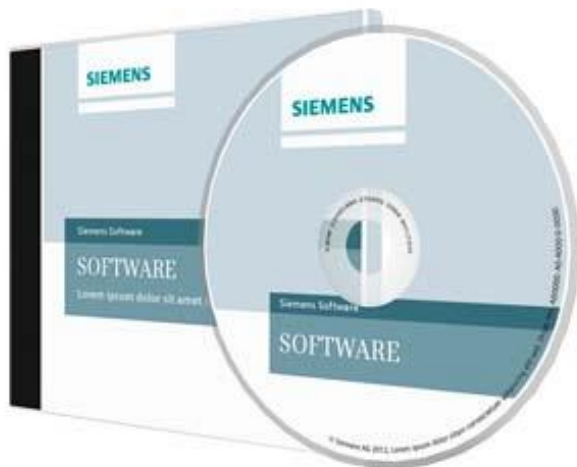


Figure similar

Standards, approvals, certificates	
developed in accordance with IEC 61131	Yes
Operating systems	
Runs under operating system	
• Windows 9x	No
• Windows ME	No
• Windows NT 4.0	No
• Windows 2000	No
• Windows XP	Yes
• Windows 7	Yes
Software	
Class A	Yes
Runtime software	
• Target system	SIMATIC CP 341/CP 441-2
Adjustable parameters	
• Response monitoring time	100 ms to 25.5 s in 100-ms grid

• Factor for the character delay time • Modem operation (ignore filler characters) • RS 485 operation for 2-wire connection • Preassignment of receive circuit on application of the X.27 interface module	1 or 10 with/without with/without Yes
Communication data	
• CRC polynomial • Receive mailbox • Master-slave coupling • Modbus protocol • implemented function codes • Broadcast Message • Transmission rate • V.24 control and signal cables • Character delay time	X16 + x15 + x2 + 1 Specified on BRCV SIMATIC S7 is master with RTU format 01, 02, 03, 04, 05, 06, 07, 08, 11, 12, 15, 16 possible 300 bit/s to 76800 bit/s; (TTY to 19200 bit/s) none 3.5 characters or multiples
Authorization/licenses	
• Single license (EL)	Yes
Documentation	
Languages	
• German • English • French	Yes Yes Yes
last modified:	10/28/2016