

INPUT INTERFACE !!! PHASE-OUT PRODUCT !!! FOR FURTHER INFORMATION PLEASE CONTACT OUR SALES STAFF!
TERMINAL-TYPE COUPLING RELAY 1C/O, HARD GOLD-PLATED, 230 V AC/DC, SCREW TERMINAL, HOUSING WIDTH 17.5 MM



Figure similar

General technical data:	
Type of voltage	AC/DC
Supply voltage frequency for auxiliary and control current circuit rated value	50 ... 60 Hz
Control supply voltage	
• at AC	
— at 50 Hz rated value	
— minimum	230 V
— maximum	230 V
— at 60 Hz rated value	
— minimum	230 V
— maximum	230 V
• at DC rated value	
— minimum	230 V
— maximum	230 V
Number of NC contacts for auxiliary contacts	0
Number of NO contacts for auxiliary contacts	0

Number of CO contacts for auxiliary contacts	1
Operating current of auxiliary contacts	
• at DC-13 — at 24 V — at 110 V — at 230 V • at AC-15 — at 24 V — at 110 V — at 230 V	1 A 0.2 A 0.1 A 3 A 3 A 3 A
Switching behavior	monostable
Equipment marking acc. to DIN 40719 extended according to IEC 204-2 acc. to IEC 750	K
Equipment marking acc. to DIN EN 61346-2	K

Mechanical data:

Type of electrical connection	screw-type terminals
Type of electrical connection Plug-in socket	No
Design of the switching function positively driven	No
Product component Plug-in socket	No
Width	17.5 mm
Height	60 mm
Depth	62 mm

Ambient conditions:

Protection class IP	IP20
Ambient temperature during operation	-25 ... +60 °C

Certificates/ approvals:

General Product Approval	Declaration of Conformity	Test Certificates	other
 CCC	 UL	 EAC	 EG-Konf.
		spezielle Prüfbescheinigungen n	sonstig

other

[Bestätigungen](#)

Further information

Information- and Downloadcenter (Catalogs, Brochures,...)

<http://www.siemens.com/industrial-controls/catalogs>

Industry Mall (Online ordering system)

<http://www.siemens.com/industrymall>

Cax online generator

<http://support.automation.siemens.com/WW/CAXorder/default.aspx?lang=en&mlfb=3TX7002-2BF02>

Service&Support (Manuals, Certificates, Characteristics, FAQs,...)

<https://support.industry.siemens.com/cs/ww/en/ps/3TX7002-2BF02>

Image database (product images, 2D dimension drawings, 3D models, device circuit diagrams, EPLAN macros, ...)

http://www.automation.siemens.com/bilddb/cax_de.aspx?mlfb=3TX7002-2BF02&lang=en

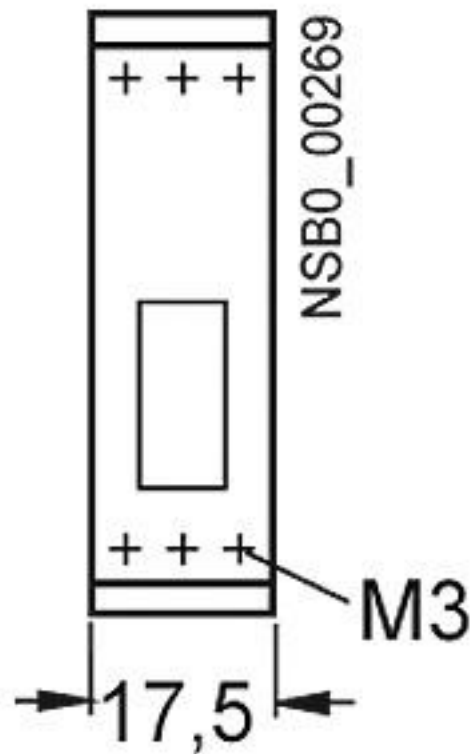


Figure similar

last modified:

10/07/2016