

55506070	DATA SHEET	
Valid from: 03.07.2018	SILVYN® MSK-M EE	

The SILVYN® MSK-M EE is a conduit and cable gland.

Developed for applications where the cable and the conduit need to be sealed and strain relieved at the same time.



Material:

Body – nickel-plated brass
O-Ring – CR / NBR
Sealing – TPE
Pressure ring – TPE
Lamellar insert – PA
Sleeve – PP

Types:

SILVYN® MSK -M EE
SILVYN® MSK-SC-M EE with EMV-spring

Protection class cable:

IP 66, test acc. to DIN EN 60529
IP 68 - 10bar / 30min, test acc. to DIN EN 60529

Protection class conduit:

IP 68 with SILVYN® FPS, FD-PU

Strain relief:

Category A acc. to DIN EN 62444

Temperature range:

-30°C up to +100°C

Norm Reference:




Suitable conduits:

SILVYN® FPS
SILVYN® FD-PU

Creator: M. Wegerer /PDP Released: DAMU1/PDP	Document: DB55506070EN Version: 03	Page 1 of 2
---	---------------------------------------	-------------

55506070	DATA SHEET	
Valid from: 03.07.2018	SILVYN® MSK-M EE	

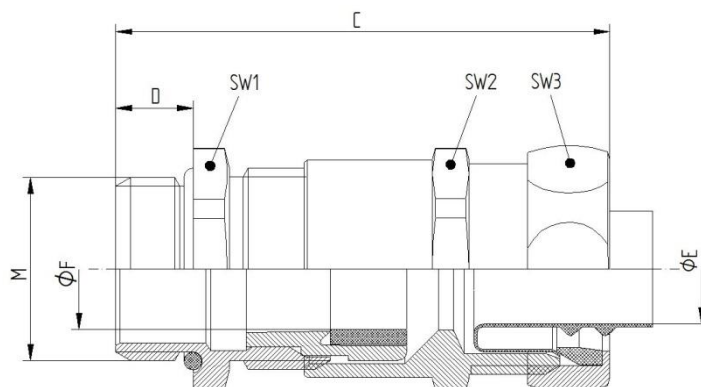

Part No.	Metric thread	NW	Clamp range Ø F mm	Ø E mm	C mm	D mm	SW 1+2	SW 3
SILVYN® MSK-M EE for SILVYN® FPS / FD-PU								
55506070	M12x1,5	10	3 – 7	6,0	43,5	6,5	16	17
55506071	M16x1,5	14	4,5 – 10	9,3	47,0	7,0	20	21
55506072	M20x1,5	17	7 – 13	11,5	52,5	8,5	24	25
55506073	M25x1,5	21	9 – 17	13,4	55,5	8,0	29	29
55506074	M32x1,5	27	11 – 21	19,5	71,5	9,0	36	36
55506075	M40x1,5	36	19 – 28	27,0	75,5	9,0	45	45
55506076	M50x1,5	45	27 – 35	36,4	81,0	10,0	54	54
55506077	M63x1,5	56	34 – 45	46,0	87,0	15,0	67	66
SILVYN® MSK-SC-M EE for SILVYN® FPS / FD-PU								
55506100	M12x1,5	10	3 – 7	6,0	43,5	6,5	16	17
55506101	M16x1,5	14	4,5 – 10	9,3	47,0	7,0	20	21
55506102	M20x1,5	17	7 – 13	11,5	52,5	8,5	24	25
55506103	M25x1,5	21	9 – 17	13,4	55,5	8,0	29	29
55506104	M32x1,5	27	11 – 21	19,5	71,5	9,0	36	36
55506105	M40x1,5	36	19 – 28	27,0	75,5	9,0	45	45
55506106	M50x1,5	45	27 – 35	36,4	81,0	10,0	54	54

For more information please see our current catalogue. Please do not hesitate to contact our laboratory if there are any questions regarding resistance against aggressive agents and special oil.

Creator: M. Wegerer /PDP Released: DAMU1/PDP	Document: DB55506070EN Version: 03	Page 2 of 2
---	---------------------------------------	-------------