



Celiane™

TV/SAT - TV/R/SAT sockets

Cat. Nos : 0 673 88/92



0 673 88



0 673 92


1. USE

TV/SAT: For receiving TV and satellite signals
TV/R/SAT: For receiving TV, radio and satellite signals
UHD (ultra high definition) compatible
Class A shielding - Star wiring
Low attenuation < 1.5 dB
Recommended cable 17/19 VATC
Single cable entry

2. RANGE


Cat. No.	Item	No. of modules
0 673 88	TV/R/SAT socket	2
0 673 92	TV/SAT socket	2

3. DIMENSIONS (mm)


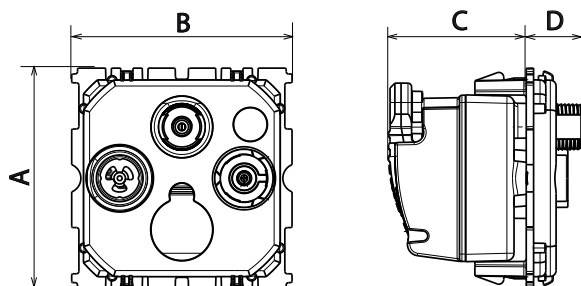


Cat. Nos	A	B	C	D
0 673 88 /92	45	45	28,1	12

4. CONNECTION

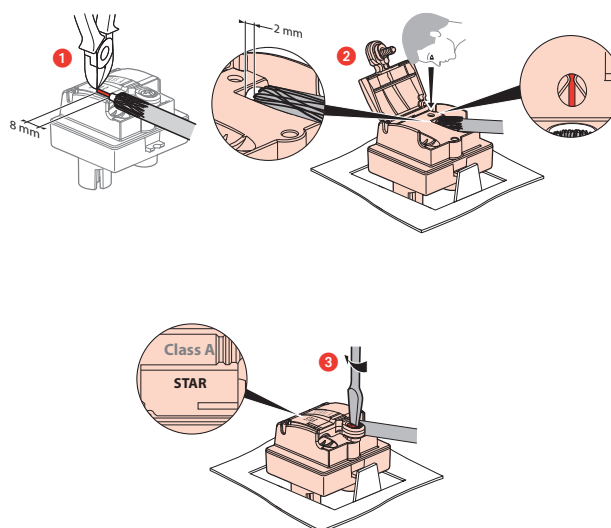

5. WIRING PRECAUTIONS

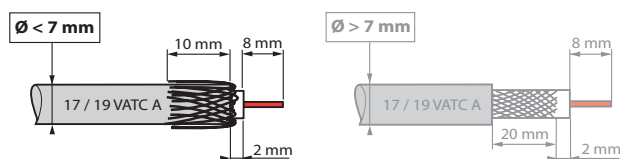

Connection from the rear of the socket reduces deformation of the coaxial cable, thus avoiding the risk of impedance loss and impaired performance.

6. TECHNICAL CHARACTERISTICS

■ 6.1 Mechanical characteristics

Protection against solid bodies and liquids: IP 21

Protection against impact: IK 04

Cable strength 120 N: IEC 61169-24

■ 6.2 Material characteristics

Material: - Cover plate: ABS

- Zero halogen

- UV resistant

Motor: - Casing: Zamac

- Cover: Zamac

- Pin: Bronze

- Screws: Zinc-plated steel

■ 6.3 Electrical characteristics

- Male connector Ø 9.52 mm (TV)

- Female connector (radio)

- Female F screw-type connector (SAT)

- Characteristic impedance: 75 ohm

Class A shielding efficiency (class A shielding is necessary to prevent interference from 3G and 4G phone signals, as these undesirable signals can cause pixellation of on-screen images or distort soundtracks)

- Frequency bands: TV: 5-68/120-862 MHz

R: 87.5-108 MHz

SAT: 950-2400 MHz

- Insulation resistance: IEC 61169-24

■ 6.4 Climate characteristics

Storage and operating temperature: -5 °C to +35 °C

7. CLEANING

Clean the surface with a cloth.



Do not use acetone, tar-removing cleaning agents or trichloroethylene.

Resistant to the following products: hexane (EN 60669-1), methylated spirit, soapy water, diluted ammonia, bleach diluted to 10%, window-cleaning products, pre-impregnated wipes.


Caution: Always test before using special cleaning products.

8. STANDARDS AND APPROVALS

- EN 50083-2
- Class A certificate

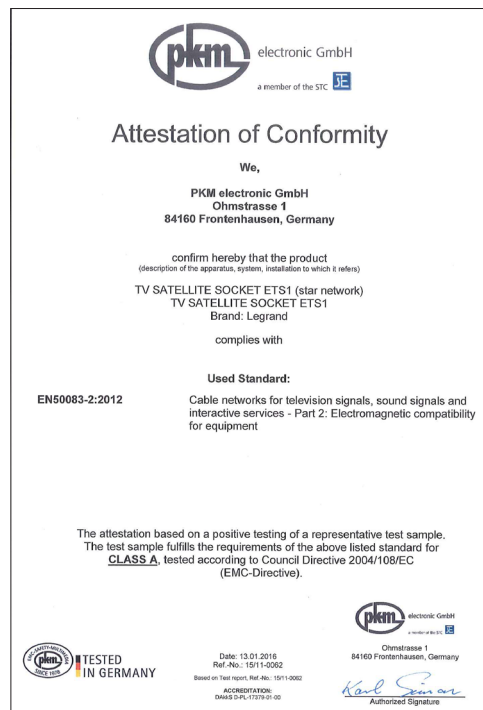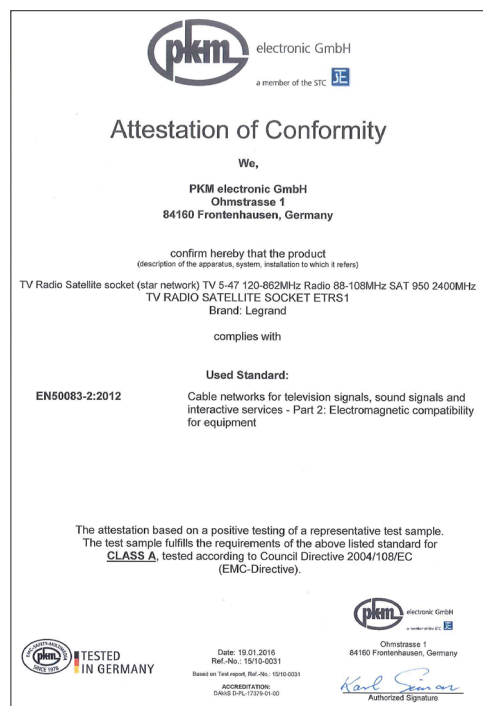

9. PERFORMANCE

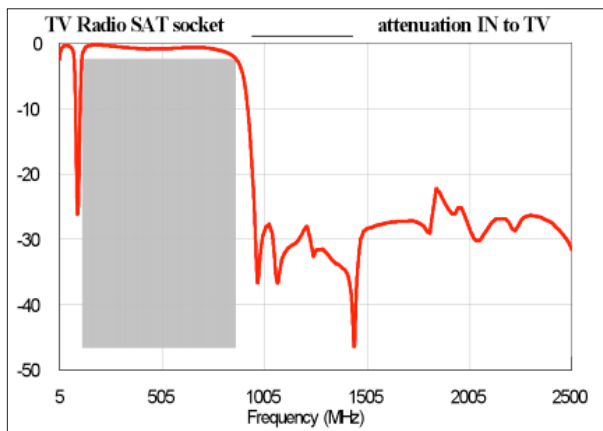

9. PERFORMANCE (continued)

