


article#	413-6ttf66
article description	CEE-flanged socket sloping (62x68mm) 16A 3p 6h IP44/IP54 TT locking
description long	CEE-flanged socket sloping (62x68mm) 16A 3p 6h IP44/IP54 TT locking housing material: PA6 rated current: 16A number of poles: 3 (2P+PE) clock-position: 6h rated voltage/frequency: 200-250V~ / 50+60Hz contacts: brass connection technology: screwless terminals (TT) dimensions (flange/fixing center): 62x68 mm / 47x47 mm lockable with padlock IP protection class: IP44/IP54
GTIN (EAN)	9003399332821
country of origin	AT
customs number	85366990
net weight	0.113 kg
packaging quantity	10

ETIM 7.0	EC001317
IEC-amperage	16 A
Voltage acc. EN 60309-2	230 V (50+60 Hz) blue
Number of poles	3
Clock hour position	6 h
Identification colour	Blue
Degree of protection (IP)	IP44
Connection system	Screw less terminal
Angle of plug	Angled
Material	Plastic
Contact material	CuZn
Surface finish contacts	Untreated
Flange size vertical	68 mm
Drill hole distance vertical	47 mm
Flange size horizontal	62 mm
Drill hole distance horizontal	47 mm

wire flexible	1-2,5 mm²
wire solid	1-4 mm²
dismantling length	50 mm
stripping length	10-12 mm

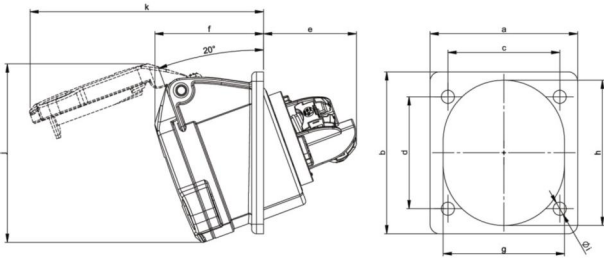

www.manufacturer-safety.info