

Data Sheet

General and Commercial Data

Product Type	Interiors - Highbay/Lowbay
Model	Lite Highbay LED
Code	76305
Description	HIGHBAY M.POWER 100/150/200W
EAN Code	8002219877666
Available Colors	Black
Application	Industrial Areas
Net Weight [kg]	3.4
Dimensions [mm]	310x88
Pieces per Pack	4

Technical Characteristics

Volume [m3]	0.02772
Insulation Class	I
IP Code	65
Impact Resistance IK Rating	8
Fire Resistance [°C]	960
Voltage [V]	230
Frequency [Hz]	50
Power Factor (cos(φ))	0.9
Luminaire Power [W]	200
Battery Life [h]	---
Luminaire Flux [lm]	20000
Luminous Efficacy [lm/W]	101
Range Ambient Temperature [°C]	-20 ÷ 40
Ballast	For constant current LED
Source	CCT 4000 K - CRI 80
Average Life [h]	30000
Source Flux [lm]	20000

Photometric Parameters


Measurement	76305o_200
CIE Code	[46,78,95,100,100]
Optics Type	Symmetrical

Notes

Possible Flux configurations [lm]: 20000/15000/10000
 Possible Power configurations [W]: 200/150/100
 Possible CCT configurations [K]: 4000

Norms

2014/35/EU
 874/2012/CE
 2009/125/CE
 EN 62471
 CEI EN 60598-2-5
 CEI EN 60598-2-2
 2014/30/EU

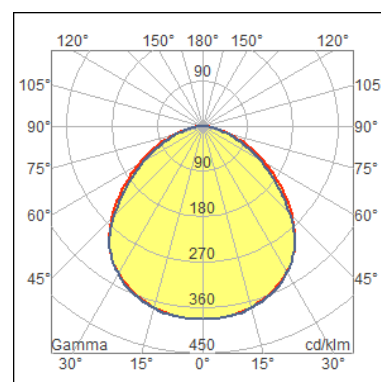

Marks

